

163391-27102021

EOS TPU 1301  
Material Data Sheet

# EOS TPU 1301

## Flexible Polymer Material

The part properties such as flexibility and level of damping of this TPU can be adjusted via structural design with lattice structure, or by adapting the process parameters



### Main Characteristics

- Great resilience
- Good hydrolysis resistance
- High UV-stability
- Very good shock absorption
- Shore hardness 86 A
- Low refresh rate

### Typical Applications

- Footwear & lifestyle parts that demand elastomeric properties, e. g. handles, shoe soles
- Automotive & industry parts, e.g. tubes, bellows, seals, gaskets
- Protective sports gear, e.g. helmet cushioning
- Applications usually made from foam can be replaced by lattice structures in EOS TPU 1301

### Headquarters

EOS GmbH  
Electro Optical Systems  
Robert-Stirling-Ring 1  
D-82152 Krailling/Munich  
Germany  
Phone +49 89 893 36-0  
info@eos.info

www.eos.info

**in** EOS

EOSGmbH

EOS.global

EOSGmbH

#ShapingFuture

### Further Offices

EOS France  
Phone +33 437 497 676

EOS Greater China  
Phone +86 21 602 307 00

EOS India  
Phone +91 443 964 8000

EOS Italy  
Phone +39 023 340 1659

EOS Japan  
Phone +81 45 670 0250


EOS Korea  
Phone +82 2 6330 5800

EOS Nordic & Baltic  
Phone +46 31 760 4640

EOS of North America  
Phone +1 877 388 7916

EOS Singapore  
Phone +65 6430 0463

EOS UK  
Phone +44 1926 675 110

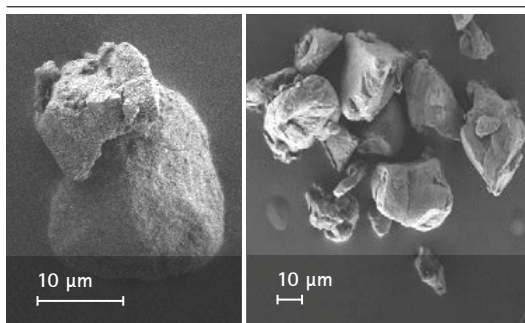

Particle size		Powder	
d10 [1]	~ 22 µm	Bulk density [2]	0,49 g/cm <sup>3</sup>
d50 [1]	~ 72 µm	Flowability [3]	~ 17 s
d90 [1]	~ 138 µm	Melting point [4]	~138 °C
<b>Part density [5, 8]</b>		~ 1,11 g/cm <sup>3</sup> Shore	

### Typical mechanical properties at room temperature [6, 7, 8]

	EOS P 396 [120 µm]		EOS P 770 [120 µm]	
	x/y	z	x/y	z
Tensile strength [MPa]	7	5	7	5
Tensile modulus [MPa]	60	60	60	50
Elongation at break [%]	250	90	250	60
Impact strength Charpy notched 23 °C [kJ/m <sup>2</sup> ]	n.b. (no break)	n.b.	n.b.	n.b.
Impact strength Charpy notched -30 °C [kJ/m <sup>2</sup> ]	n.b.	n.b.	n.b.	n.b.

[1] Laser diffraction (wet), as per ISO 13320-1 [2] as per DIN EN ISO 60 [3] as per DIN EN ISO 6186 [4] as per DIN 53736

[5] as per DIN EN ISO 1183-1 [6] as per DIN EN ISO 527 [7] as per DIN EN ISO 868

[8] Part properties stated above are provided for information purposes only and EOS makes no representation or warranty whatsoever, and disclaims any liability, with respect to actual part properties achieved with this material. Part properties are subject to variation and dependent on factors such as system parameters, process and test geometries. Therefore actual part properties may deviate and users of this material are exclusively responsible to determine its suitability for the intended use. The part properties stated above have been determined by testing this material with above specified type of EOS laser sintering system, EOSYSTEM and EOSPRINT software version, parameter set and operation in compliance with parameter sheet and operating instructions. Part properties are measured with specified measurement methods using defined test geometries and procedures. Further details of the test procedures used by EOS are available on request.

#### Important note:

This data sheet specifies the powder properties of the EOS powder type referenced above. If you purchase powder from EOS, EOS will deliver such powder in conformity with the version of this data sheet prevailing at the time of your order. If you purchase powder from any source other than EOS, EOS makes no warranties or representations with respect to powder properties to you whatsoever, and claims with respect to the quality or properties of EOS powder are available only against the seller of such powder in accordance with your agreement with the seller, not against EOS. EOS data sheets are subject to change without notice. This data sheet does not constitute a guaranty or warranty of properties or fitness for a specific purpose and may not be relied upon as such.

